

Document reader Regula 70X4M



Full page passport reader with no moving parts inside.

Automatic reading and authenticity verification of passports, IDs, visas, driver's licenses and other identification documents.

Optical character recognition, reading of barcodes, RFID and SmartCard chips.



A small-sized reader for desktop use. Hard plastic body. The device is connected to a PC via a USB cable. No moving parts. Reliable, convenient and easy-to-use.

The device allows capturing images in white, infrared, ultraviolet and coaxial lights. Certain models are equipped with modules for reading RFID chips and smart cards. The device is supplied with software development kit (SDK) for easy integration into existing end-user systems.

Reader Regula 70X4M can be optionally equipped with a flip-top cover.

Functionality

- Capturing and processing images
 - supported document formats
 - ID-1
 - ID-2
 - ID-3
 - other documents with maximum size 88×128 mm
 - o automatic detection of a document in a scanning zone
 - automatic scanning after document detection
 - elimination of glare from laminate and holograms in white and IR light
 - compensation of external light hitting during image capture in ultraviolet light (Smart UV)
 - o automatic selection of UV illumination intensity according to the document type
 - search and cropping of a document image from a general image
- The MRZ detection and recognition
- · Recognition and reading of 1D and 2D barcodes
- Automatic recognition of a document type
- Processing graphic fields
- OCR of the visual zone
- Reading RFID tags
- · Analyzing and comparing text data
- · Automatic authenticity verification of a document

Operation

- 1. The optical reader automatically detects a document in the scanning area of the device.
- 2. Document images are captured in different illumination modes. At the same time data is read from RFID tags and smart cards.
- 3. Regula Document Reader SDK processes data.
- 4. Results of the verification are ready for further use.

Application

- · Border control services
- Aviation security services
- Law-enforcement agencies
- Immigration services
- Financial institutions
- Hotels
- Car rental and leasing companies
- Cellular companies
- · Business centers security service
- Event-agencies
- Medical institutions
- Tourist agencies
- · Ticket offices



- Visa support agencies and consulates
- Insurance companies
- Casino security service

Additional functions

- A USB-port available for connecting other devices
- Programmable indicators of the device status:
 - multicolour LED indicator red, yellow, green
 - buzzer

Delivery Set

- Regula Document Reader SDK
- USB cable for connecting the reader to a PC
- Optionally:
 - o external power supply
 - scratch resistant glass (Sapphire)



Functionality		Model		
		7024M.111	7034M.111	
sources	White	+	+	
	Infrared 870 nm	+	+	
	Ultraviolet 365 nm	+	+	
	Coaxial white	+	+	
Reader of radio frequency identification devices (RFID)		+	+	
Smart card reader			+	

Optical reader

- Scanning area, mm 88×128: full passport page
- Video sensor:
 - type CMOS
 - colour model RGB
 - o color depth, bit 24

	Model			
	7024M.111-5A, 7034M.111-5A	7024M.111-5, 7034M.111-5	7024M.111-18, 7034M.111-18	
Number of megapixels	5	5	18	
Resolution, ppi	470 ± 5%	500 ± 5%	860 ± 10%	
Frame size, pixels	2592×1944	2592×1944	4908×3684	

Reader of radio frequency identification devices (RFID)

- Supported standards ISO 14443: type A and B
- Data exchange rate, Kbaud 106, 212, 424, 848
- Reading an RFID tag regardless of its position in the document
- Anti-collision: reading an RFID tag according to the MRZ

Smart card reader for model Regula 7034M

- Supported standards ISO/IEC 7816-1, -2, -3, -4; EMV2000 4.1, Level 1
- Data exchange rate, Kbaud 2-500
- Smart card type asynchronous, T = 0 and T = 1

Device technical specifications

- Overall dimensions (length×width×height), mm:
 - ∘ **Regula 7024M** 179×160×99
 - ∘ Regula 7034M 190×160×99
- Weight, not more than, kg 0,82
- Power supply voltage from a USB port, V 5
- Power supply voltage from AC adapter (AC 100-240 V / DC 5 V) optionally
- Scratch resistant glass (Sapphire) optionally



Regulatory

- CE RED, LVD & EMC
- EU WEEE, REACH & RoHs Directive
- FCC Part 15 Class B for Regula 7024M.XXX-5A and 7034M.XXX-5A
- UL for Regula 70X4M.XXX-5Aonly

Climatic conditions

- Relative air humidity 20...95% (non-condensing)
- Air temperature, °C -10...+50
- IP51



Document reader software development kit (SDK)

SDK (Full) consists of three modules:

- Basic supplied together with a device by default
- VizOCR reading textual fields from a document page
- AAC automatic authenticity control

VizOCR and AAC modules are optional and used to extend the functionality of Basic module.

Updates for SDK are provided regularly. Basic module has unlimited support. VizOCR and AAC are updated on subscription basis.

Functionality		Full SD	Full SDK modules		
		Basi c(supplied by default)	VizOCR	AAC	
Doc	ument image capture and processing				
Document formats	 ID-1 (identity card) ID-2 (passport card, visa) ID-3 (passport) other document formats up to 88×128 mm 	+			
Scanning process	 document detection sensor automatic scanning after document detection elimination of glare from laminate and holograms for white and infrared illumination compensation of external light hitting during image capture in UV light (Smart UV) automatic intensity selection of UV illumination for a certain document type search and cropping of a document image from a received image 	+			
	Machine readable zone (MRZ)				
Supported MRZ formats	 in conformity with ICAO 9303: 44×2 30×3 36×2 in conformity with ISO IEC 18013 (IDL): 30×1 support of special MRZ data structure for documents of certain countries 	+			
Features	 search for the MRZ along the whole document image MRZ recognition in infrared and white light control of check digits and data structure in conformity with the requirements of ICAO 9303 and BSI TR-03105 Part 5.1 evaluation of MRZ quality specifications in conformity with ICAO 9303, ISO 7501, 1831, 1073-2 standards 	+			
	Barcodes				
Supported formats	 1D: Codabar, Code39 (+extended), Code93, Code128, EAN-8, EAN-13, IATA 2 of 5 (Airline), Interleaved 2 of 5 (ITF), Matrix 2 of 5, STF (Industrial), UPC-A, UPC-E 2D: PDF417, Aztec Code, QR Code, Datamatrix 	+			



Authentication	barcode format check			+
Au	tomatic document type recognition			
Order of document type recognition	Country→Type→Series		+	+
Features	receiving a document template from the SDK database containing the following information: • text and graphic fields position • availability of barcodes and security features • authenticity verification and its parameters • RFID-chip availability • a reference image from Information Reference Systems "Passport", "Autodocs", "Frontline Documents System" • processing of the received document images in compliance with the sample, including document image rotation by the angle given in the sample		+	+
	Graphic fields processing			
Types of graphic fields	 portrait of the document holder signature barcode fingerprint, etc. 	+		
Features	 cropping and displaying graphic fields as separate images in compliance with the sample of the corresponding document automatic searching of faces on the document image and cropping the document holder portrait if the document type is not recognized document image rotation according to the document holder portrait position 	+		
	OCR of the visual zone			
Recognition of character sets	 Central European and Eastern European Latin (1250) Cyrillic (1251) Western European Latin (1252) Greek (1253) Turkish (1254) Baltic (1257) other fonts of any size 		+	
Features	 dictionary support (name, surname, address, country, etc.) automatic text division into separate fields (e.g. dividing the address into postal code, country, state, etc.) recognition of dates with complex formats recognition of characters from different character sets in one line 		+	
RFID SDK				
Supported RFID-chip standards	 ISO/IEC 14443-2 (type A and B) ISO/IEC 14443-3 (MIFARE® Classic Protocol) ISO/IEC 14443-4 	+		
Data access modes	DirectBACEACPACESAC	+		



Authentication	 active (AA) passive (PA) chip (CA v1, CA v2) terminal (TA v1, TA v2) 	+	
Supported applications	 ePassport (DG1-DG16) eID (DG1-DG21) eSign eDL (DG1-DG14) 	+	
Certificate management	 local storage receiving certificates online through the program interface Master List, CRL support 	+	
Features	 reading RFID chips with extended length support reading RFID chips in compliance with ICAO LDS 1.7, PKI 1.1 data formats certified by BSI TR-03105 Part 5.1, BSI TR-03105 Part 5.2 	+	
Aı	nalysis and comparison of text data		
Document areas for cross-checking of the readout data	 MRZ VIZ RFID-chip barcode contact chip (Smart Card) 	+	
Verification	 validity of any dates authenticity of names and surnames according to lists of wordstops zero numbers of sample documents 	+	
Adjustment of formats and measuring units to those used in the user OS	dateweightheight, etc.	+	
Features	 complete or partial comparison of fields integration of data received from several document pages calculated field support (age, etc.) transliteration to Latin characters in compliance with ICAO 9303 standards for comparison with the MRZ 	+	
	Authenticity verification		
Operation available for any document	 checking luminescence (UV Dull Paper) of: the form the MRZ area the portrait area checking the MRZ print contrast in compliance with ICAO 9303(IR B900 Ink) 	+	
Operations available after document type recognition	 checking image patterns in white, IR and UV light checking luminescence of UV protection fibers detection of false luminescence checking photo embedding type: printing or attachment checking IR Visibility of: elements of the form text data the photograph (main and additional) detection of holograms (OVD), OVI 		+




Features	 reading a luminescent text and comparing it with the data obtained from the MRZ and VIZ (OCR Security Text) visualization of IPI (Invisible Personal Information) checking retroreflective protection checking barcode format checking operations are adjusted to documents with different degrees of wear and tear the choice of checking operations depends on security 		+
	features available in a questioned document Additional SDK functions		
Image formats	 .BMP .JPG .JP2 .PNG .TIF other image formats are possible on request 	+	
Interoperability	 comparison modules: fingerprint images from RFID chip and externalfingerprint scanner face images from document data page and/or RFID chip Information Reference Systems «<u>Passport</u>», «<u>Autodocs</u>», «<u>Frontline Documents System</u>» 	*	
OS compatibility	 Windows 7 (x86, x64), Windows 8, Windows 10, Windows 11, Ubuntu 20.04—24.04, Debian 11—12, RHEL 9, macOS 11+` 	+	
Drivers	Microsoft certified	+	
Features	 simultaneous optical scanning and RFID chip reading firmware upgrade via USB interface (automatic upgrade after installing new SDK version) multilingual interface 	+	
Software updates			
SDK	twice a year	*	
Document template database	• monthly	*	

^{* -} on request / individual agreement



Visual zone

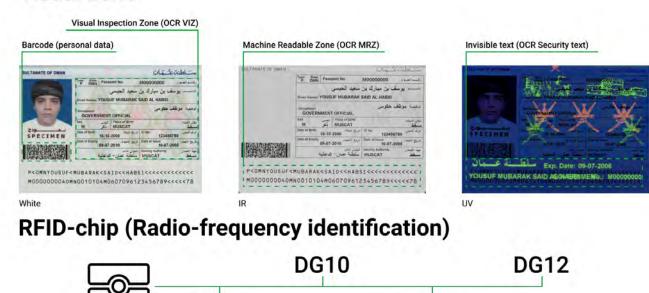

DG11


Document data readout: textual data readout

Visual zone



RFID-chip (Radio-frequency identification)

DG₁



Document data readout: graphic data readout



White



Performed security checks in white light





Performed security checks in infrared light



UV



Performed security checks in ultraviolet light



Checking photo embedding type: printing or attachment





Checking the blank of the document



Checking the personal data





Viewing the passport from IRS database



MRZ of the passport





Visual zone of the passport



RFID-chip of the passport






Text data comparison of the passport




Graphic data comparison of the passport



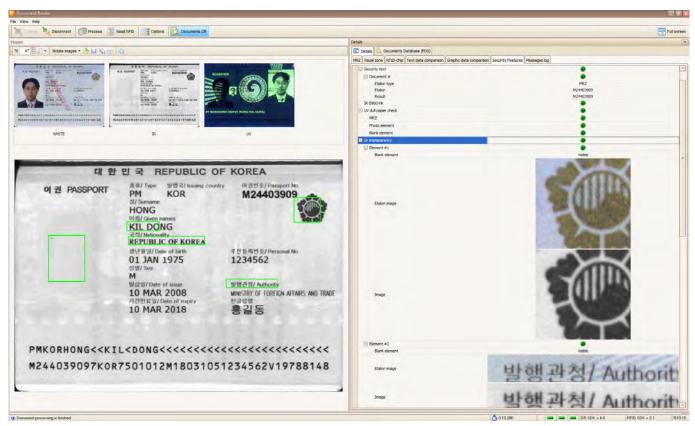

Security features of the passport

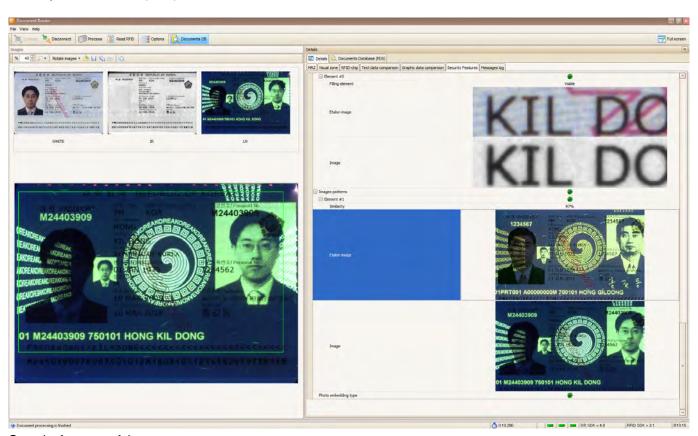

Security features of the passport